

FIG. 1

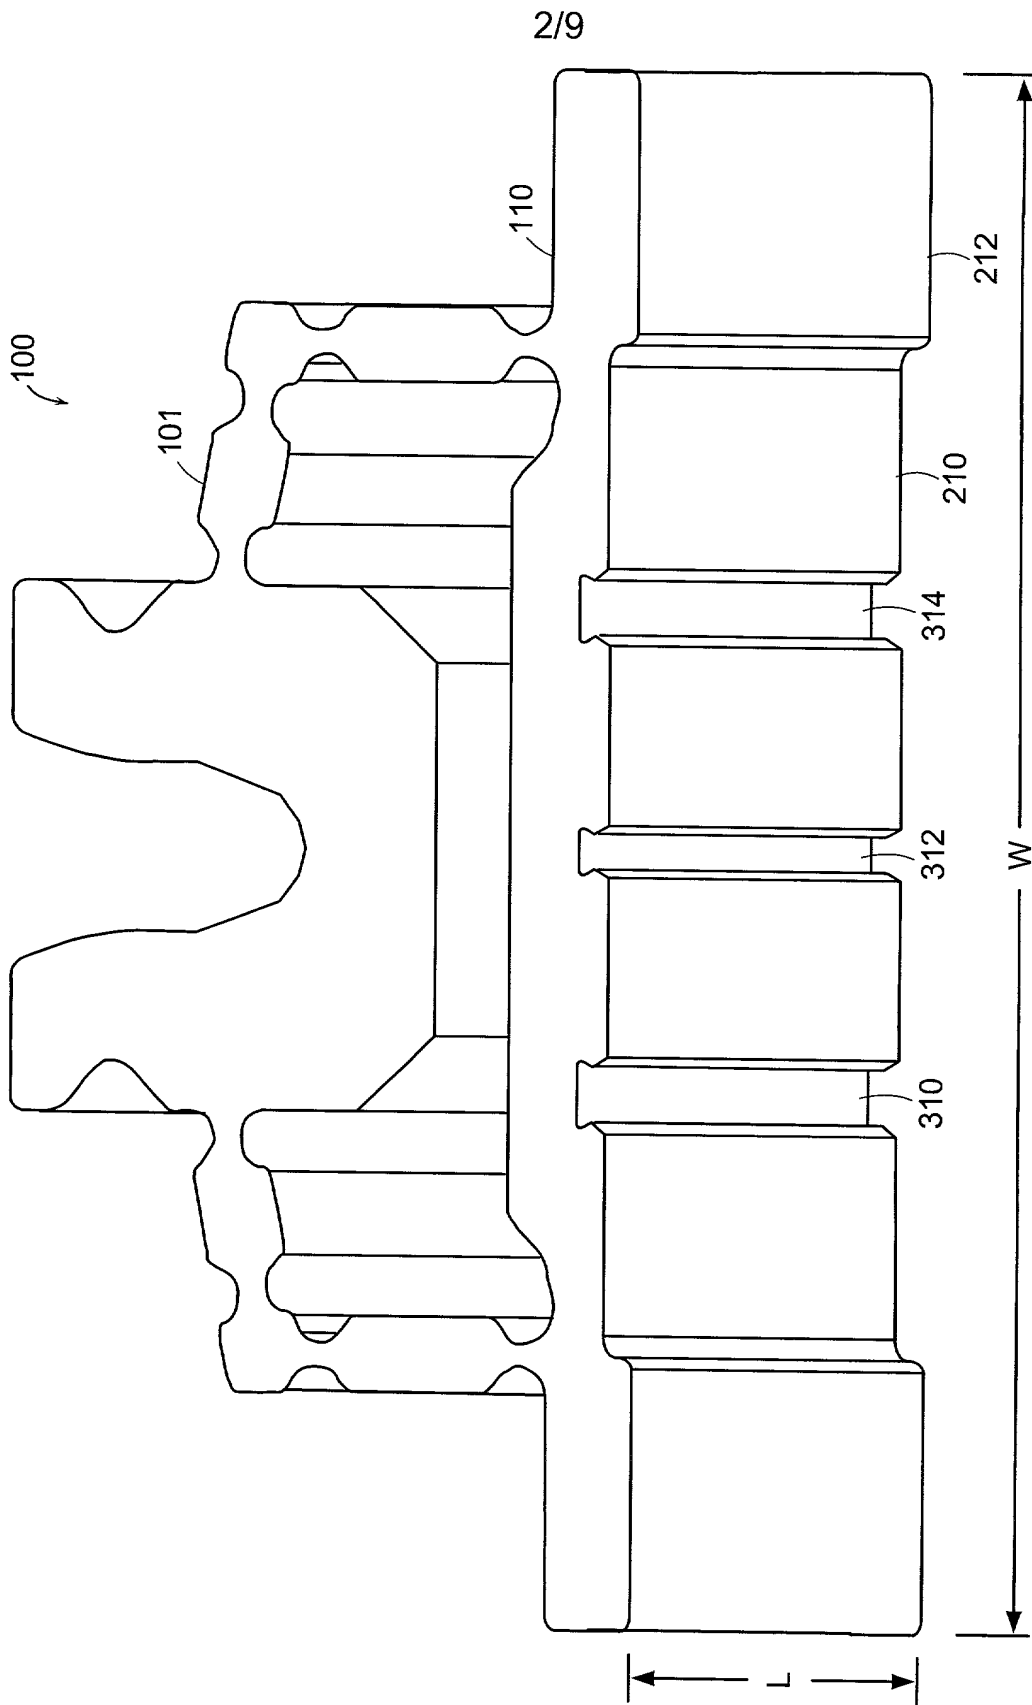


FIG. 2

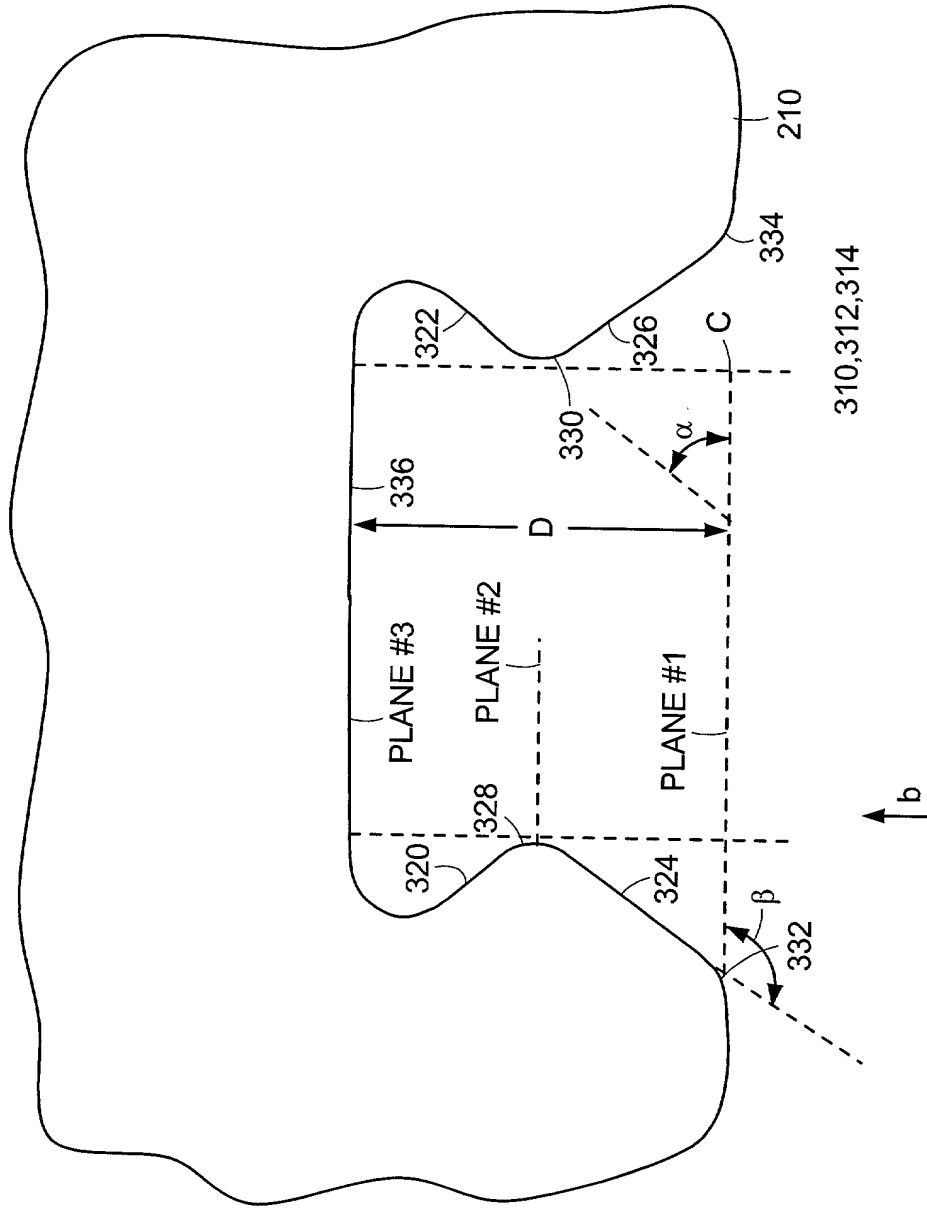
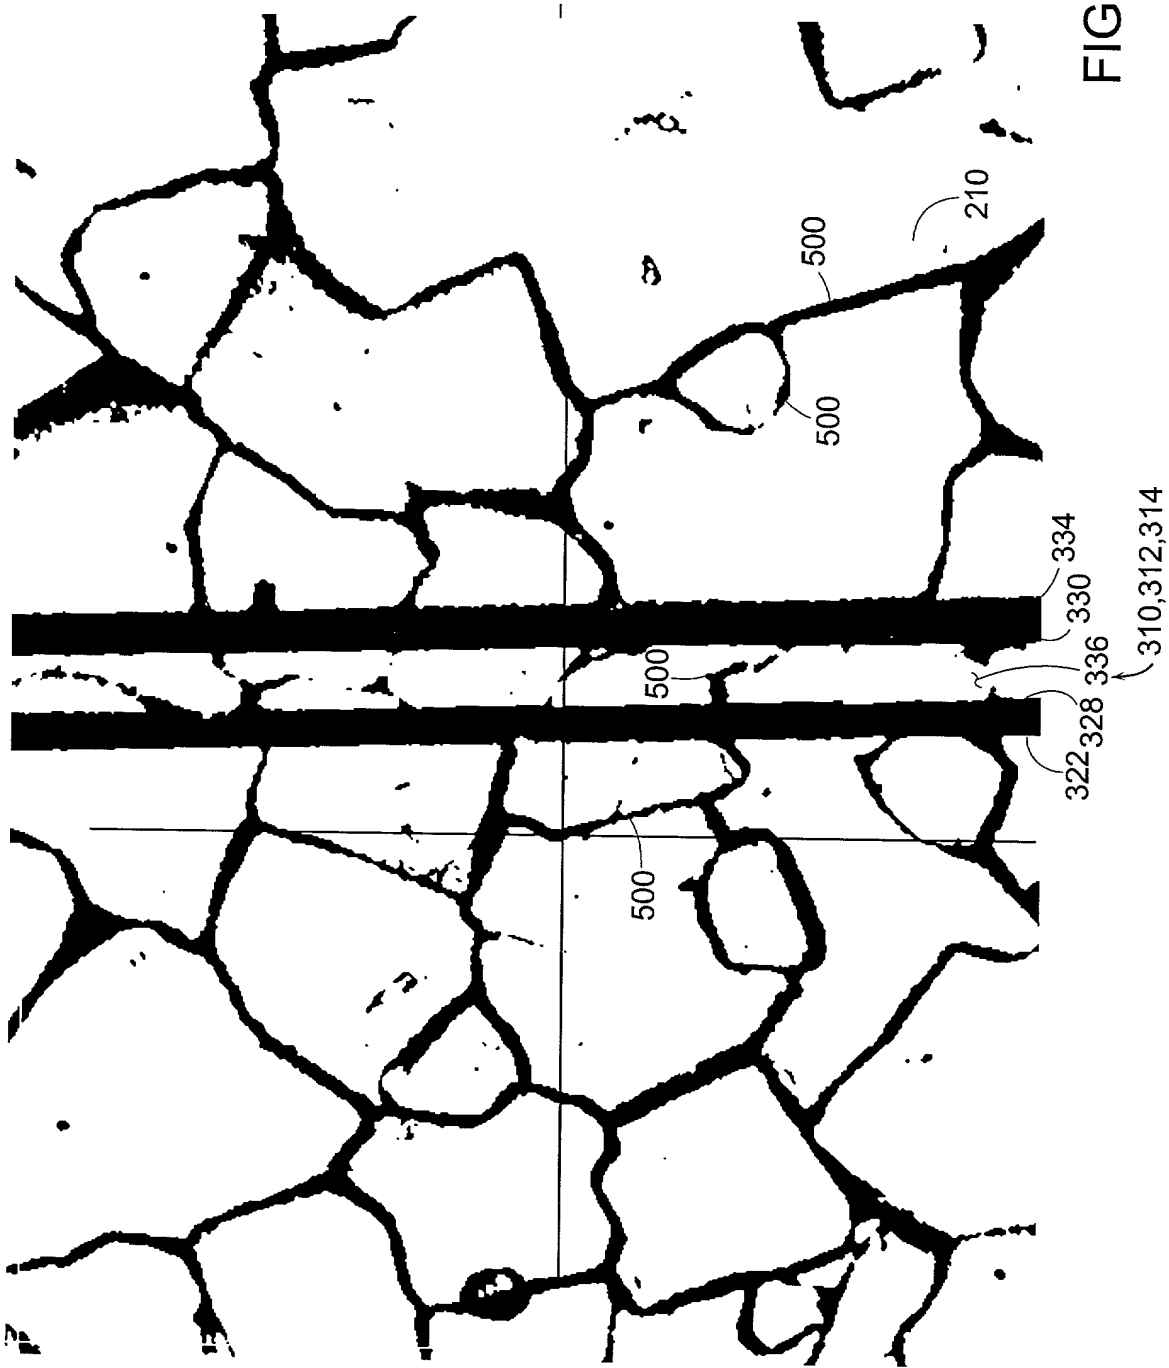


FIG. 3



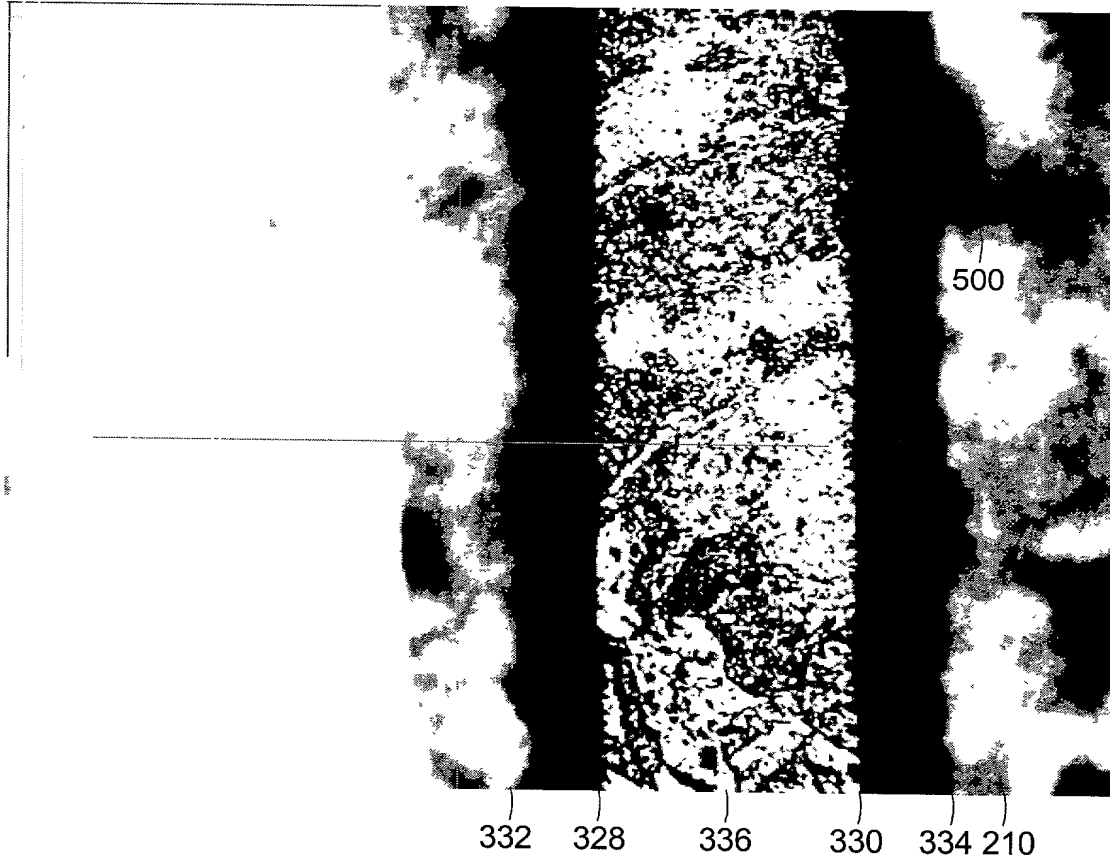


FIG. 5

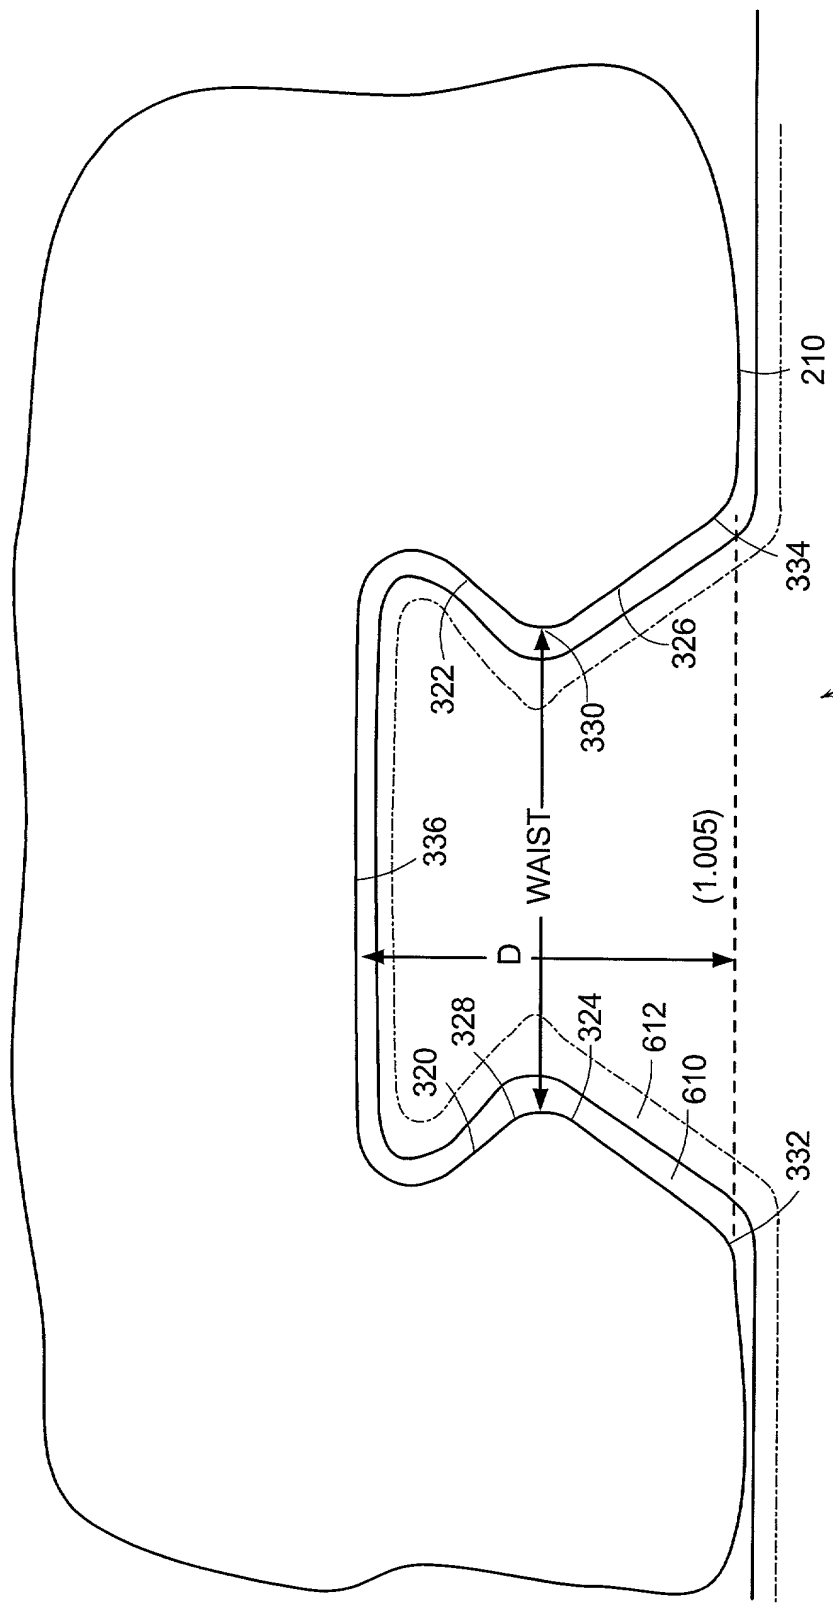


FIG. 6

FIG. 6 is a cross-sectional view of a device in accordance with one embodiment of the present disclosure. The device includes a central waist section 330, a left side section 320, and a right side section 322. The waist section 330 has a width D. The left side section 320 includes a top surface 328 and a bottom surface 336. The right side section 322 includes a top surface 326 and a bottom surface 334. The device is shown in a perspective view, with a dashed line indicating a cross-section. The overall length of the device is indicated as (1.005).

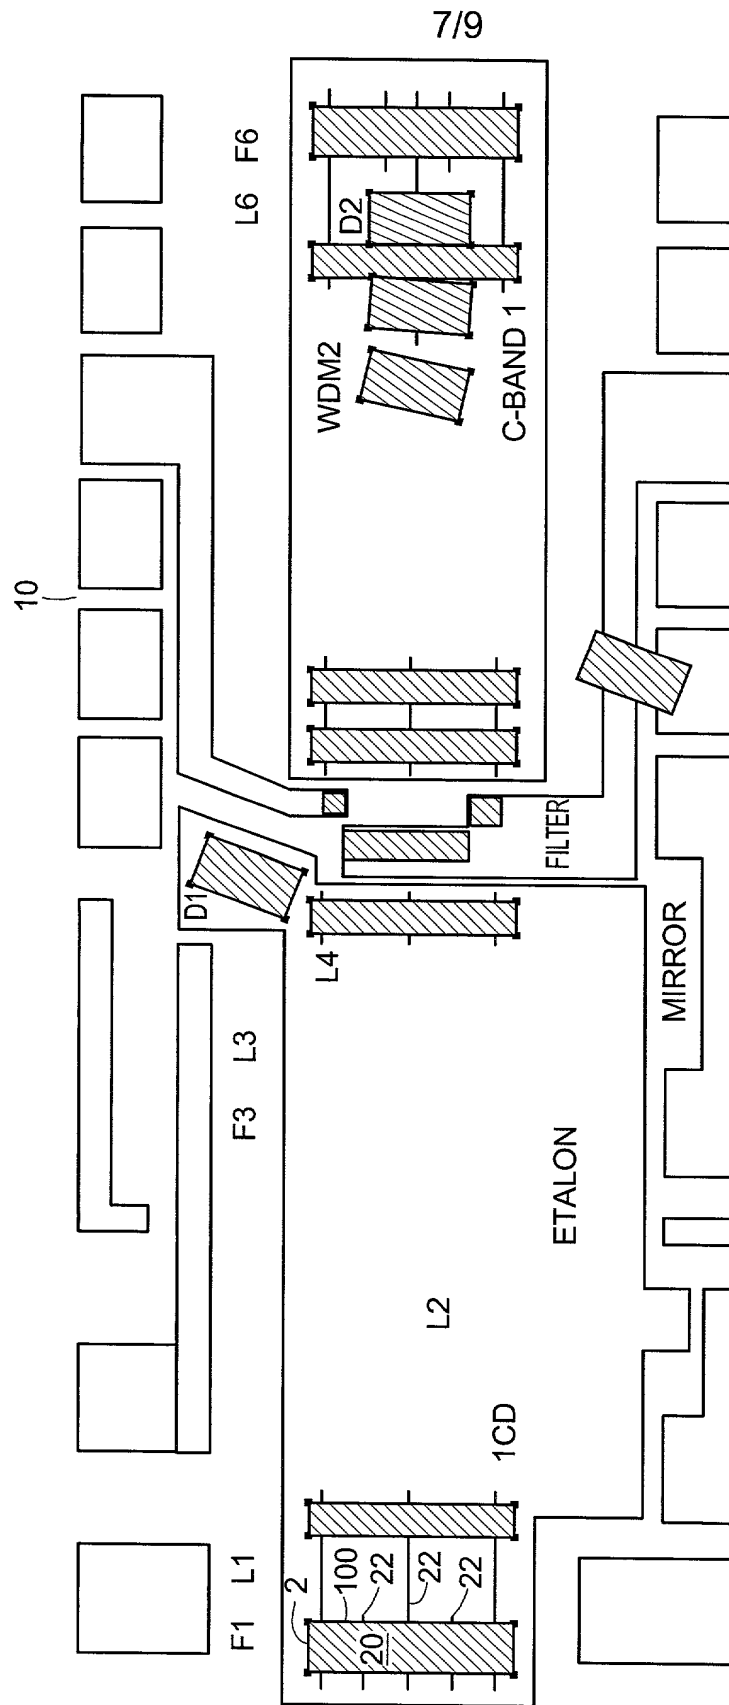


FIG. 7

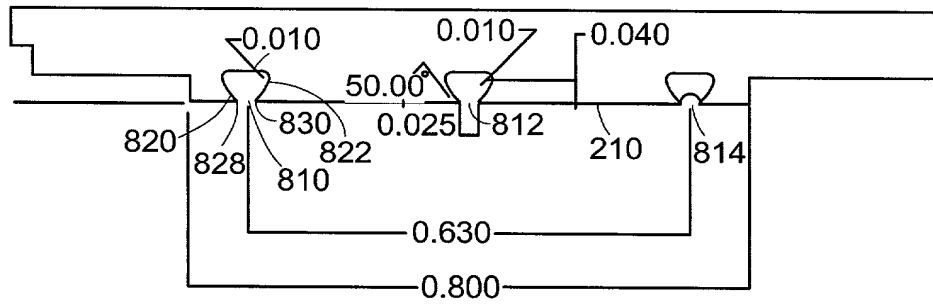


FIG. 8



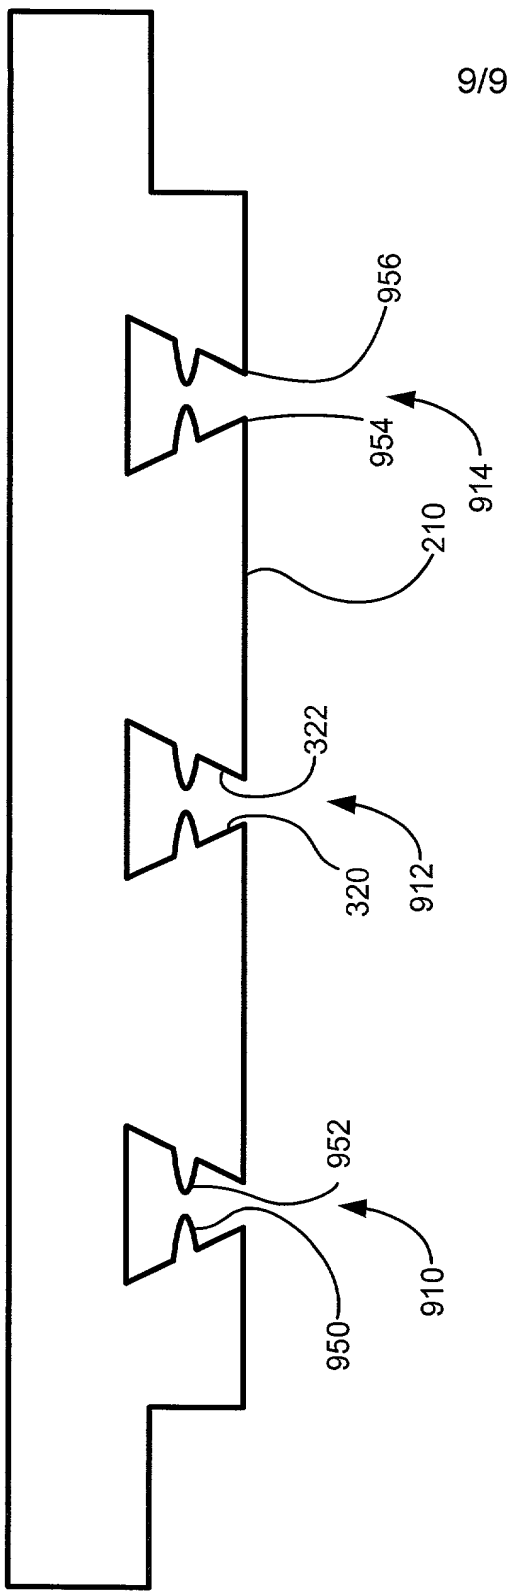


Fig. 9